


# DS44-230/G



- Type 2 AC Multipolar surge protector
- In : 20 kA
- I<sub>max</sub> total : 40 kA
- Pluggable module for each phase
- Remote signaling option
- EN 61643-11, IEC 61643-11 compliance
- UL1449 ed.5

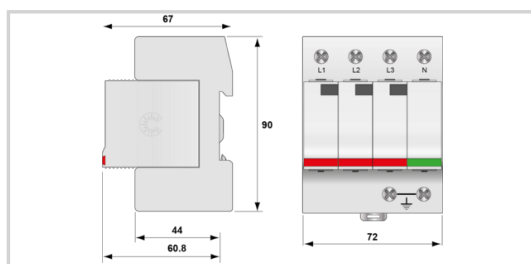

Electrical Characteristics	
SPD type	2
Network	230/400 V 3-phase+N
AC system	TT-TNS
Nominal line voltage	U <sub>n</sub> 230 Vac
Max. AC operating voltage	U <sub>c</sub> 255 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT 580 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT 440 Vac disconnection
Temporary Over Voltage N/PE (TOV HT) Without disconnection or with safety disconnection	UT 1200 V/300A/200 ms withstand
Residual Current Leakage current to Ground	I <sub>pe</sub> None
Follow current	I <sub>f</sub> None
Nominal discharge current 15 x 8/20 μs impulses	I <sub>n</sub> 20 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I <sub>max</sub> 40 kA
Total Maximum discharge current max. total withstand @ 8/20 μs	I <sub>max</sub> Total 40 kA
Connection mode(s)	L/N and N/PE
Protection mode(s)	Common/Differential mode
Residual voltage at 5 kA @ 5 kA (8/20μs)	Up-5kA 0.9 kV
Protection level L/N @ I <sub>n</sub> (8/20μs)	Up L/N 1.25 kV
Protection level L/PE @ I <sub>n</sub> (8/20μs)	Up L/PE 1.5 kV
Admissible short-circuit current	I <sub>sc</sub> 25 000 A
Mechanical Characteristics	
Technology	MOV+GDT
SPD configuration	3-phase+Neutral
Connection to Network	By screw terminals: 2.5-25mm <sup>2</sup> / by bus
Format	Plug-in modular box
Mounting	Symmetrical rail 35 mm (EN 60715)
Housing material	Thermoplastic UL94 V-0
Operating temperature	T <sub>u</sub> -40/+85°C
Protection rating	IP20
Failsafe mode	Disconnection from AC network
Disconnection indicator	1 mechanical indicator by pole
Spare module(s)	DSM40-230+DSM40G-600
Remote signaling of disconnection	option DS44S-230/G: output on changeover contact
Dimensions	See diagram
Weight	0.325 kg
Disconnectors	
Thermal disconnector	Internal
Installation ground fault breaker	Type 'S' or delayed
Fuses	Fuses type gG - 50 A
Standards	
Standards compliance	IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification	UL / CSA / EAC / TÜV
Part number	
461512	