


MJ6-1T/D



- Telecom line surge protector
- PSTN, ADSL2, VDSL
- 1-pair + Shielded
- Instantaneous installation
- RJ11 connector
- UL497A

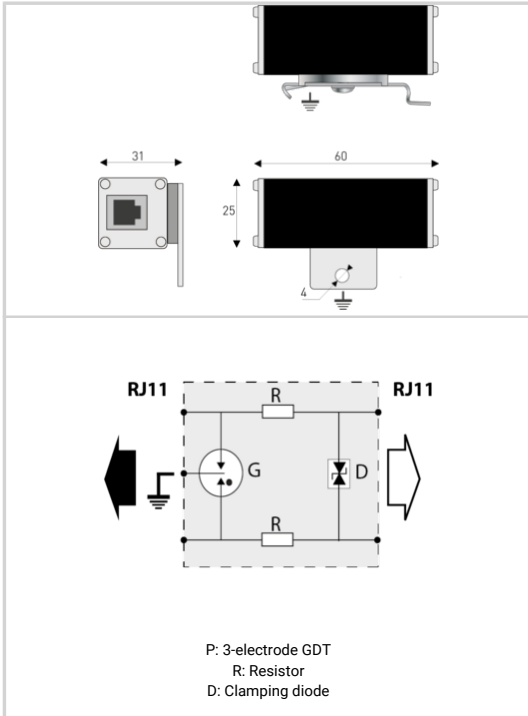

Electrical Characteristics		
Network		Telephone Line, ADSL2, VDSL2, 1 pair
Nominal line voltage	Un	150 Vdc
Max. DC operating voltage	Uc	170 Vdc
Max. frequency	f max.	> 10 MHz
Max. data rate		30 Mbps
Insertion loss		< 1 dB
Max. load current	IL	300 mA
Protection level @ In (8/20µs)	Up	220 V
Protection level Following the test category C3 (IEC61643-21) - Line/Line	Up	220 V
Protection level L/N @ In (8/20µs)	Up L/N	220 V
Protection level L/PE @ In (8/20µs)	Up L/PE	220 V
Max. capacitance	C	< 70 pF
Impulse current 2 x 10/350µs Test - D1 Category	Iimp	500 A
Line/Line Nominal discharge current C2 Category	In L/L	2500 A
Line/Ground Nominal discharge current 8 /20µs Test x 10 - C2 Category	In L/PE	2500 A
Mechanical Characteristics		
Technology		GDT+Clamping diode
SPD configuration		1-pair+shielded
Connection to Network		RJ11 connector female input/output
Format		RJ11 Connector
Mounting		Mounting flange, Screw lug
Housing material		Aluminium
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Outdoor application		No
Failsafe mode		Short-circuit
Disconnection indicator		Transmission interrupt
Remote signaling of disconnection		No
Pinout		1-pair (3-4)
Dimensions		See diagram
Weight		0.06 kg
Standards		
Standards compliance		IEC 61643-21 / EN 61643-21 / UL497A
Part number		
560412		